

TruPoint Doctor Blade

Flexo Concepts is a global manufacturer of doctor blades for precision metering, wiping and cleaning. We offer high-quality solutions for companies that print, applying coatings, or are engaged in other continuous production processes.

Corrugated

TRUPOINT
UHMW™



TruPoint UHMW™ is the original ultra high molecular weight polyethylene doctor blade ideal for applications combining long runs, coarse anilox engravings and abrasive coatings or inks.

Product Benefits & Features:

- No Anilox Scoring
- Also Used for Containment

Structure	Hardness	Max. Temp	Length	Thickness	Edge Profile	Max. Width
Ultra High Molecular Weight Polyethylene	Shore D 68	203°F / 95°C	Standard Roll Length: 100' / 30m Cut to Length available	.030" / 0.80mm .040" / 1.00mm .050" / 1.25mm .063" / 1.60mm .080" / 2.00mm .090" / 2.30mm .125" / 3.20mm	Straight Bevel 30° 45°	5" / 127mm

TRUPOINT
DURAPPOINT™



TruPoint DuraPoint™ is made from an exclusive high-density formulation UHMW designed to offer superior blade life and enhanced graphics. DuraPoint is a direct replacement for standard UHMW as both a metering and containment blade.

Product Benefits & Features:

- Consistent Metering
- No Anilox Scoring
- Also Used for Containment


Structure	Hardness	Max. Temp	Length	Thickness	Edge Profile	Max. Width
Ultra High Molecular Weight Polyethylene	Shore D 68	203°F / 95°C	Standard Roll Length: 100' / 30m Cut to Length available	.030" / 0.80mm .040" / 1.00mm .050" / 1.25mm .063" / 1.60mm .080" / 2.00mm .090" / 2.30mm .125" / 3.20mm	Straight Bevel 30° 45°	5" / 127mm



TruPoint Green® is stiff, durable, and resists mechanical creep, allowing for better print quality throughout the entire life of the blade. TruPoint Green® also contains recaptured carbon, making it truly green and reducing the world's carbon footprint!

- Product Benefits & Features:
- Consistent Metering
 - Resistance to Blade Bending
 - No Anilox Scoring
 - Increased Blade life
 - Eco-Friendly

Structure	Hardness	Max. Temp	Length	Thickness	Edge Profile	Max. Width
Polyketone	Rockwell R 95	203°F / 95°C	Standard Roll Length: 100' / 30m Cut to Length available	.030" / 0.80mm .050" / 1.27mm .063" / 1.60mm .080" / 2.00mm	Bevel 30° 45°	2" / 50.8mm

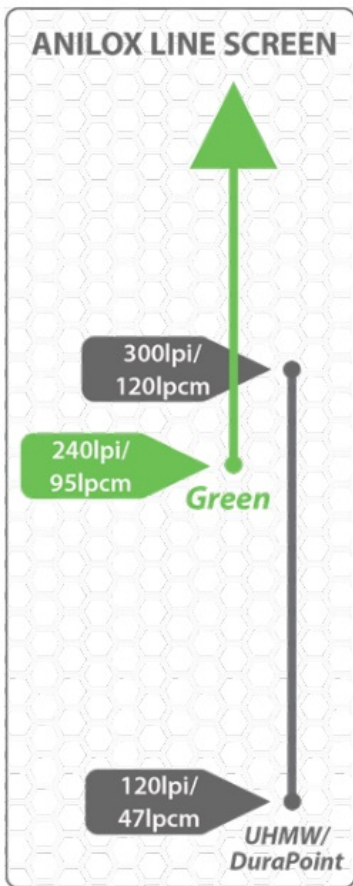

Corrugated Products

